

## RG Series 85°C

### Features

#### Standard capacitors

#### Applications

- ◆ Frequency converters
- ◆ Uninterruptible power supplies

#### Features

- ◆ All-welded construction ensures reliable electrical contact
- ◆ Self-extinguishing electrolyte
- ◆ RoHS-compatible

#### Construction

- ◆ Charge-discharge proof, polar
- ◆ Aluminum case with insulating sleeve
- ◆ Poles with screw terminal connections
- ◆ Mounting with ring clips, clamps




### Specifications

Item	Performance Characteristics					
Rated voltage $V_R$	160... 450 V DC					
Surge voltage $V_S$	1.15 $V_R$ (for $V_R \leq 315$ V) or 1.10 $V_R$ (for $V_R > 315$ V)					
Rated capacitance $C_R$	680 ... 68000 $\mu$ F					
Capacitance tolerance	$\pm 20\%$					
tan $\delta$ (at 20°C, 120Hz)	Less than the value under table(%)					
	$\Phi D$	35	51	63.5	76.2	89
	WV	15	15	20	20	20
		20	20	25	25	25
Leakage Current $I_{leak}$ (20 °C, 5 min)	$I_{leak} \leq 0.3\mu A * (C * V)^{0.7} + 4\mu A$					
Self-inductance ESL	d = 51 mm: approx. 17 nH					
	d $\geq$ 63.5 mm: approx. 20 nH					
	Capacitors with low-inductance design:					
	d $\geq$ 63.5 mm: approx. 15 nH					
Useful life 85 °C; $V_R, I_{AC}^2 R$	> 6000 h	Requirements: $\Delta C/C \leq \pm 40\%$ of initial value ESR $\leq$ 4 times initial specified limit $I_{leak} \leq$ initial specified limit				
Voltage Endurance test 85 °C; $V_R$	2000 h	Post test requirements: $\Delta C/C \leq \pm 20\%$ of initial value ESR $\leq$ 2 times initial specified limit $I_{leak} \leq$ initial specified limit				
Vibration Resistance test	To IEC 60068-2-6, test Fc:					
	Displacement amplitude 0.75 mm, frequency range 10 ... 55 Hz, acceleration max. 10 g, duration 3X2 h. Capacitor mounted by its body which is rigidly clamped to the work surface.					
Low Temperature Characteristics	Max. impedance ratio at 120 Hz					
	$V_R$	$\leq 400$ V	$\geq 450$ V			
	$Z_{-25^\circ C} / Z_{20^\circ C}$	6	4			
	$Z_{-40^\circ C} / Z_{20^\circ C}$	22	16			
Sectional specification	IEC 60384-4 and JIS-C-5101					

## Dimensional drawings

Ring clip/clamp mounting:

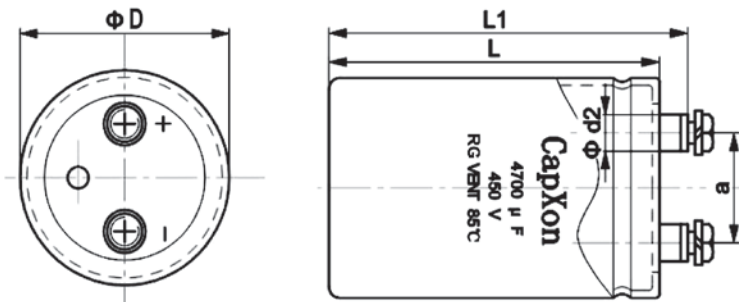

M5:Min.reach of screw = 8mm  
M6:Min.reach of screw = 12mm

## Dimensions

Terminal	Dimensions(mm) with insulating sleeve				
	$D \pm 2$	$L \pm 3$	$L_1 \pm 3$	$d_2 \text{max.}$	$a \pm 0.5$
M5	35	50~120	56.5~126.5	10.3	12.7
M5	51	80~140	86.5~146.5	10.3	22
M5	63.5	80~140	86.5~146.5	10.3	28.6
M5	76.2/89	100~240	106.4~246.5	10.3	31.8
M6	76.2/89	100~240	106.4~246.5	17.5	31.8

## Packing

Diameter D(mm)	Length L(mm)	Packing (pcs.)
35	$\leq 70\text{mm}$	120
	$> 70\text{mm}$	60
42	$\leq 70\text{mm}$	120
	$> 70\text{mm}$	60
51	$\leq 70\text{mm}$	70
	$> 70\text{mm}$	35
63.5	all	24
76.2	all	15
89	all	12

## Accessories

The following items are included in the delivery package, but are not fastened to the capacitors.

	Thread	Maximum torque
For terminal	M5	2 Nm
	M6	2.5 Nm

## Case Size

φ DxL(mm)

WV(V) Cap(μF)	160		200		250	
	Size	Ripple	Size	Ripple	Size	Ripple
680					35x60	1.80
1000	35x60	2.80	35x60	3.00	35x80	3.30
1500	35x60	3.00	35x80	3.30	35x80	3.50
2200	35x80	3.50	35x100	4.20	35x120	3.80
	35x100	4.00			51x80	4.00
2700			35x120	4.70	51x80	4.40
3300	35x100	4.70	35x120	4.80	51x100	5.40
	35x120	5.20	51x80	4.90	51x120	5.80
3900	51x80	5.30	51x80	5.50	51x115	6.30
4700	51x80	6.00	51x100	6.40	51x120	7.00
					51x140	7.50
					63.5x100	7.30
6800	51x100	7.80	51x120	7.30	51x140	8.50
	51x120	8.50	51x140	9.00	63.5x120	9.20
8200					76.2x100	9.50
	51x120	9.20	63.5x100	9.40	63.5x115	10.00
10000	51x140	10.50	63.5x100	10.40	76.2x120	11.50
	63.5x100	10.50	63.5x120	11.20	76.2x140	12.30
12000	63.5x100	11.50	76.2x100	12.10	76.2x115	12.90
15000	63.5x120	12.50	76.2x120	13.00	76.2x150	14.50
	63.5x140	14.50	76.2x140	14.20	76.2x160	15.10
	76.2x100	13.00			89x120	14.50
22000	76.2x120	16.50	76.2x160	17.80	89x160	18.50
	76.2x140	17.00	89x120	17.00		
27000	76.2x140	18.00	89x130	18.00		
68000	89x230	23.00				

Ripple Current(A,rms) at 85°C 120Hz


φ DxDL(mm)

WV(V) Cap(μF)	350		400		450	
	Size	Ripple	Size	Ripple	Size	Ripple
1000	35x100	4.50	35x120	4.60	51x80	4.50
			51x80	4.60	51x105	5.00
1500	51x80	4.90	51x80	5.40	51x100	5.80
			51x100	5.70	51x120	6.30
			51x105	6.00	63.5x80	6.00
2200	51x100	6.60	51x100	6.90	51x120	7.30
	51x105	6.80	51x120	7.40	63.5x100	7.60
	51x120	7.20	51x140	7.70	63.5x105	7.80
					63.5x120	8.30
2700	63.5x80	7.50	63.5x105	8.50	76.2x105	9.00
3300	51x120	8.00	51x130	8.60	63.5x120	9.50
	51x140	8.30	63.5x100	8.90	63.5x140	10.00
	63.5x100	8.10	63.5x120	9.40	76.2x120	10.50
3900	63.5x105	9.80	76.2x100	10.30	76.2x120	11.00
			76.2x105	10.50	76.2x140	12.00
4700	63.5x120	10.50	76.2x100	11.00	76.2x120	12.00
	63.5x140	11.20	76.2x120	12.00	76.2x140	13.00
	76.2x100	10.50			76.2x160	13.50
5600	63.5x140	12.50	76.2x140	13.80	76.2x160	14.00
6800	76.2x120	14.00	76.2x140	15.00	76.2x160	15.00
	76.2x140	14.90	76.2x160	16.00		
	89x100	14.00				
8200	76.2x160	16.00	76.2x160	16.50	76.2x220	18.00
10000	76.2x160	16.50	76.2x160	16.70	76.2x220	19.00
	89x120	16.00	89x130	16.70	89x170	19.00
12000	76.2x180	20.50	89x160	19.50		
	76.2x220	22.50	89x220	23.00		
15000	89x160	23.00	76.2x230	26.50		
	89x220	26.50	89x180	26.00		
			89x220	28.00		
18000	89x220	30.00	89x240	31.00		
22000	89x230	33.00				


Ripple Current(A,rms) at 85°C 120Hz

## Useful life


depending on ambient temperature  $T_a$  versus under ripple current operating conditions

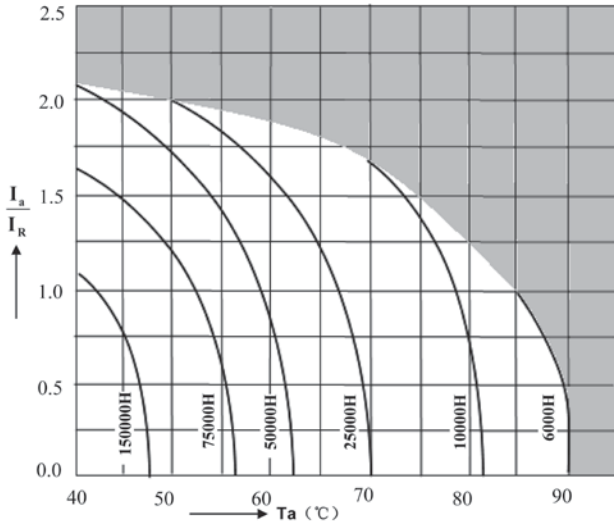

Frequency factor of permissible ripple current  $I_{RC}$  versus frequency  $f$

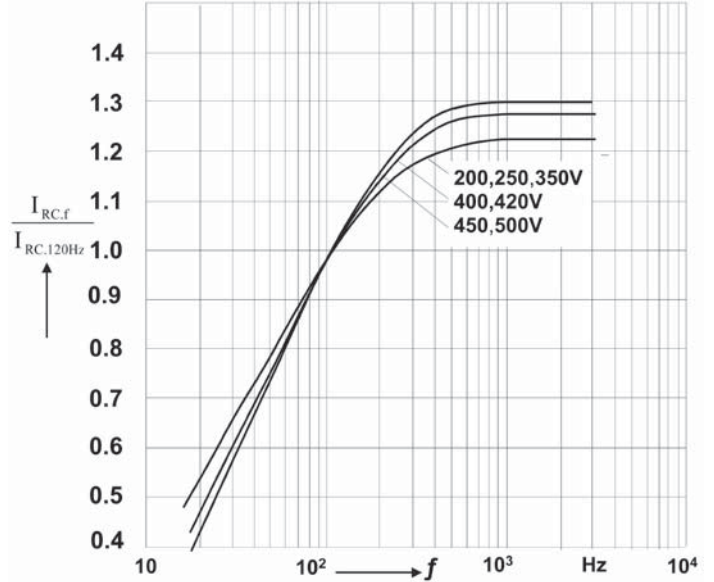

Frequency characteristics of ESR Typical behavior

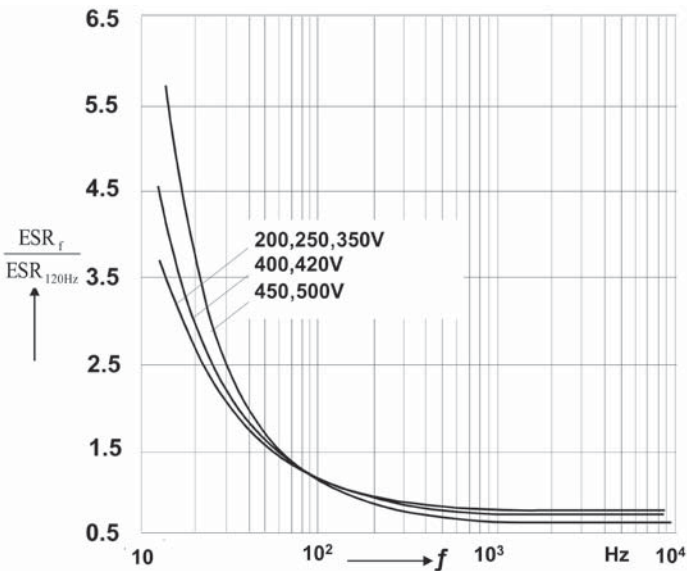

Impedance Z versus frequency f

