

RU Series 85°C

Features

Extremely Long useful life

Applications

- ◆ Professional power supplies
- ◆ Frequency converters
- ◆ Uninterruptible power supplies

Features

- ◆ Long useful life
- ◆ High reliability
- ◆ High ripple current capability
- ◆ All-welded construction ensures reliable electrical contact
- ◆ Version with low-inductance design available
- ◆ Self-extinguishing electrolyte
- ◆ RoHS-compatible

Construction

- ◆ Charge-discharge proof, polar
- ◆ Aluminum case with insulating sleeve
- ◆ Poles with screw terminal connections
- ◆ Mounting with ring clips, clamps or threaded stud




Specifications

Item	Performance Characteristics					
Rated voltage V_R	350... 450 V DC					
Surge voltage V_S	1.15 V_R (for $V_R \leq 315$ V) or 1.10 V_R (for $V_R > 315$ V)					
Rated capacitance C_R	1000 ... 22000 μ F					
Capacitance tolerance	$\pm 20\%$					
tan δ (at 20°C, 120Hz)	Less than the value under table(%)					
	ΦD	35	51	63.5	76.2	89
	WV	15	15	20	20	20
	160~250	15	15	20	20	20
	350~450	20	20	25	25	25
Leakage Current I_{leak} (20 °C, 5 min)	$I_{leak} \leq 0.3\mu A * (C * V)^{0.7} + 4\mu A$					
Self-inductance ESL	d = 51 mm: approx. 17 nH					
	d \geq 63.5 mm: approx. 20 nH					
	Capacitors with low-inductance design:					
	d \geq 63.5 mm: approx. 15 nH					
Useful life 85 °C; V_R, I_{AC^2R}	> 12000 h	Requirements: $\Delta C/C \leq \pm 50\%$ of initial value ESR \leq 5 times initial specified limit $I_{leak} \leq$ initial specified limit				
Voltage Endurance test 85 °C; V_R	2000 h	Post test requirements: $\Delta C/C \leq \pm 20\%$ of initial value ESR \leq 2 times initial specified limit $I_{leak} \leq$ initial specified limit				
Vibration Resistance test	To IEC 60068-2-6, test Fc:					
	Displacement amplitude 0.75 mm, frequency range 10 ... 55 Hz, acceleration max. 10 g, duration 3X2 h. Capacitor mounted by its body which is rigidly clamped to the work surface.					
Low Temperature Characteristics	Max. impedance ratio at 120 Hz					
	V_R	≤ 400 V	≥ 450 V			
	$Z_{-25^\circ C} / Z_{20^\circ C}$	3	4			
	$Z_{-40^\circ C} / Z_{20^\circ C}$	9	12			
Sectional specification	IEC 60384-4 and JIS-C-5101					

Dimensional drawings

Ring clip/clamp mounting:

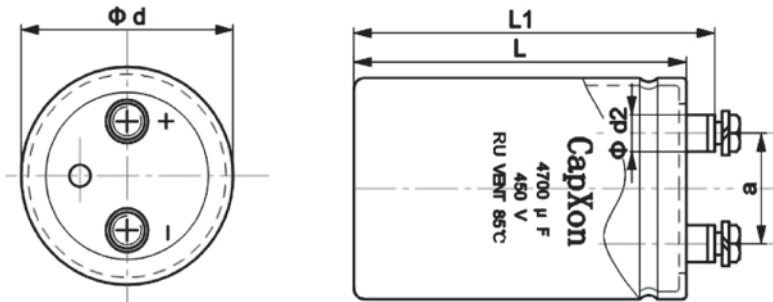

M5:Min.reach of screw = 8mm
M6:Min.reach of screw = 12mm

Dimensions

Terminal	Dimensions(mm) with insulating sleeve				
	D±2	L±3	L ₁ ±3	d ₂ max.	a±0.5
M5	35	50~120	56.5~126.5	10.3	12.7
M5	51	80~140	86.5~146.5	10.3	22
M5	63.5	80~140	86.5~146.5	10.3	28.6
M5	76.2/89	100~240	106.4~246.5	10.3	31.8
M6	76.2/89	100~240	106.4~246.5	17.5	31.8

Packing

Diameter D(mm)	Length L(mm)	Packing (pcs.)
35	≤70mm	120
	>70mm	60
42	≤70mm	120
	>70mm	60
51	≤70mm	70
	>70mm	35
63.5	all	24
76.2	all	15
89	all	12

Accessories

The following items are included in the delivery package, but are not fastened to the capacitors.

	Thread	Maximum torque
For terminal	M5	2 Nm
	M6	2.5 Nm

Case Size


φ DxL(mm)

WV(V) Cap(μF)	350		400		450	
	Size	Ripple	Size	Ripple	Size	Ripple
1000			51x80	4.6	51x80	4.8
					51x105	5.5
1500	51x80	5.7	51x80	6.0	51x100	6.5
			51x100	6.6	51x120	7.0
			51x105	6.6	63.5x80	6.7
2200	51x100	7.4	51x100	8.0	63.5x100	8.3
	51x105	7.6	51x120	8.6	63.5x105	8.5
	51x120	8.0	51x140	9.5	63.5x120	9.0
2700	63.5x80	9.0	63.5x105	9.5	76.2x105	10.5
3300	51x120	10.0	51x130	11.0	63.5x140	12.0
	51x140	10.5	63.5x100	11.0	76.2x100	12.0
	63.5x100	10.5	63.5x120	12.0	76.2x120	13.0
3900	63.5x105	12.0	76.2x100	14.0	76.2x120	13.5
			76.2x105	14.0	76.2x140	14.5
4700	63.5x120	13.5	76.2x100	14.5	76.2x120	15.0
	63.5x140	14.5	76.2x120	15.6	76.2x140	16.0
	76.2x100	13.5			76.2x160	17.0
5600	63.5x140	15.0	76.2x140	17.0	76.2x160	18.0
	76.2x105	15.0				
6800	76.2x120	17.0	76.2x140	19.0	76.2x160	19.0
	76.2x140	18.0	76.2x160	20.0		
	89x100	18.0				
8200	76.2x140	20.0	76.2x160	21.0	76.2x220	24.0
	76.2x160	21.0				
10000	76.2x160	24.5	76.2x190	25.0	76.2x220	27.0
	89x120	23.5	89x160	26.0	89x170	26.0
12000	76.2x180	28.0	89x160	28.0		
	76.2x220	30.0	89x220	32.0		
	89x145	28.0				
15000	76.2x220	33.0	76.2x230	32.0		
	89x160	32.0	89x180	32.0		
	89x220	36.0	89x220	35.0		
18000	89x220	38.0	89x240	37.0		
22000	89x230	40.0				


Ripple Current(A,rms) at 85°C 120Hz

Useful life


depending on ambient temperature T_a versus under ripple current operating conditions

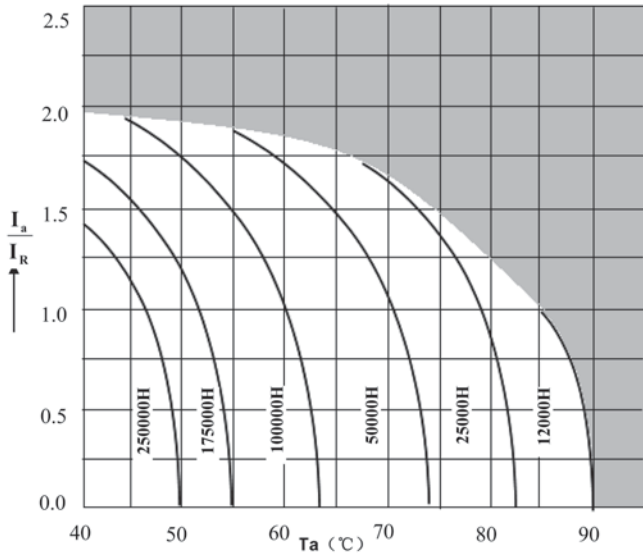

Frequency factor of permissible ripple current I_{RC} versus frequency f

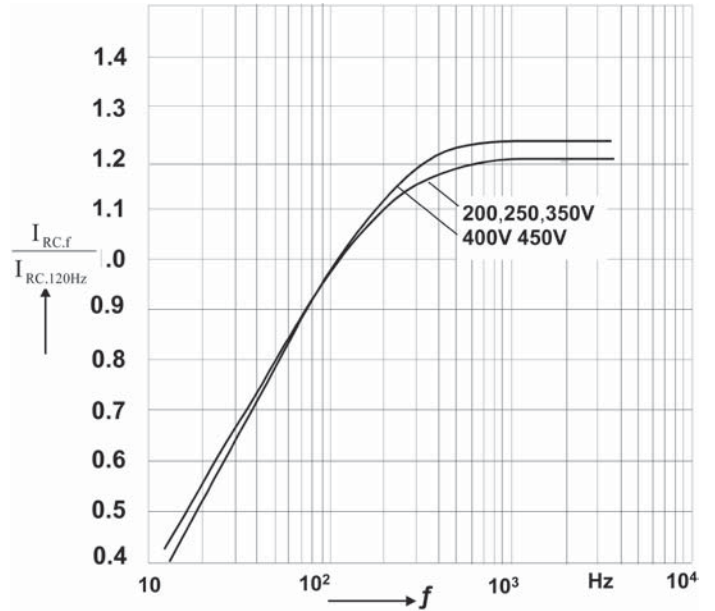

Frequency characteristics of ESR Typical behavior

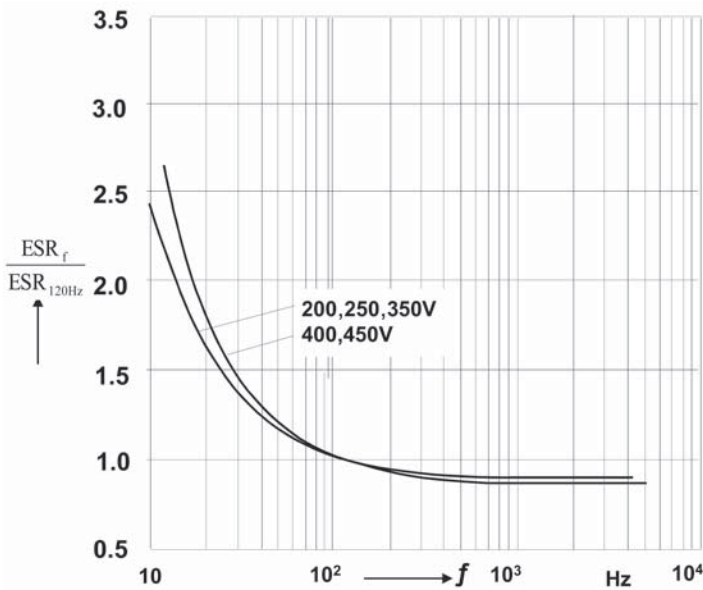

Impedance Z versus frequency f

