

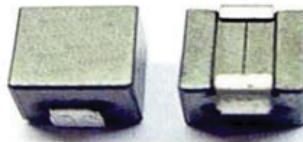


OLE WOLFF

SMD POWER INDUCTORS



## OWIPS6430 TYPE

**FEATURES**

1. 125°C maximum total temperature operation. Surface mount inductors designed for higher speed switch mode applications requiring lower inductance and high current.
2. Inductance range from 0.047 $\mu$ H to 0.12 $\mu$ H.
3. Current range up to 47Amps.





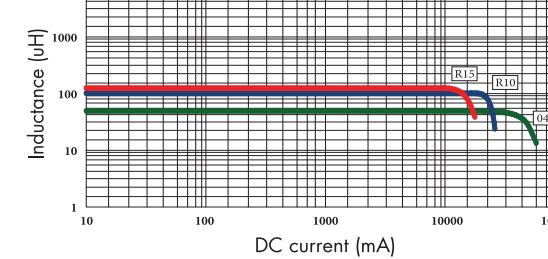
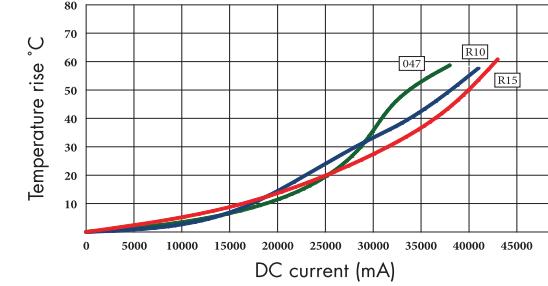
**APPLICATIONS**

1. Next generation microprocessors.

**ELECTRICAL CHARACTERISTICS FOR OWIPS6430 SERIES**

Part Number	Inductance ( $\mu$ H) <sup>(1)</sup>	Test Frequency	DC Resistance ( $\Omega$ MAX) <sup>(2)</sup>	Saturation Current (A) <sup>(3)</sup>	Temperature Current (A) <sup>(4)</sup>
OWIPS6430-047	0.047	1MHz	0.26m	42	30
OWIPS6430-068	0.068	1MHz	0.26m	32	30
OWIPS6430-082	0.082	1MHz	0.26m	26	30
OWIPS6430-R10	0.100	1MHz	0.26m	22	30
OWIPS6430-R12	0.120	1MHz	0.26m	18	30
OWIPS6430-R15	0.150	1MHz	0.26m	14.5	30

www.owolff.com

**OWIPS6430 Inductance decrease by current****OWIPS6430 Temperature rise by current**

1. Inductance tested at 0.25V. Tolerance of inductance: $\pm 20\%$
2. DCR test temp. limits 25°C.
3. This indicates the value of current when the inductance is 25% lower than its initial value at D.C. superposition or D.C. current
4. To load current onto the components under normal ambient which cause the temp. change as  $\Delta t=40^{\circ}\text{C}$  or more lower current.
5. Please refer saturated current or the minimum temperature current as standard.