



OWIB73C TYPE




FEATURES


1. Various high power inductors are superior to be high saturation for surface mounting.

APPLICATIONS


1. Power supply for VTR, OA equipment.
2. LCD television set, notebook PC.
3. Portable communication, equipments.
4. DC/DC converters, etc.

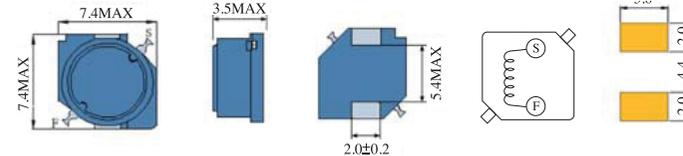

OWIB73C Inductance decrease by current

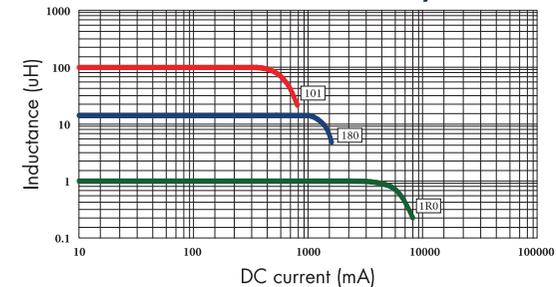

OWIB73C Temperature rise by current

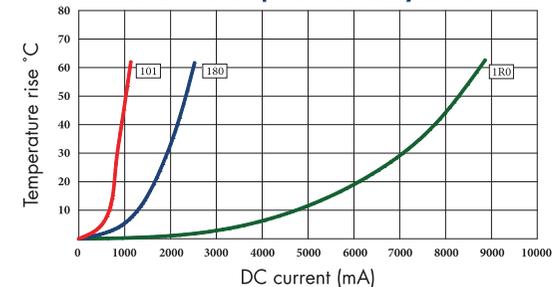

ELECTRICAL CHARACTERISTICS FOR OWIB73C SERIES

Part Number	Inductance (uH) ⁽¹⁾	Test Frequency	DC Resistance (Ω MAX) ⁽²⁾	Saturation Current (A) ⁽³⁾	Temperature Current (A) ⁽⁴⁾
OWIB73C-1R0	1.0	1KHZ	19m	3.12	6.60
OWIB73C-1R5	1.5	1KHZ	23m	2.85	5.90
OWIB73C-2R2	2.2	1KHZ	28m	2.66	5.30
OWIB73C-3R3	3.3	1KHZ	35m	2.26	4.50
OWIB73C-4R7	4.7	1KHZ	43m	1.96	3.50
OWIB73C-6R8	6.8	1KHZ	55m	1.76	3.15
OWIB73C-100	10	1KHZ	80m	1.34	2.52
OWIB73C-120	12	1KHZ	90m	1.23	2.26
OWIB73C-150	15	1KHZ	0.12	1.09	2.15
OWIB73C-180	18	1KHZ	0.13	0.99	1.81
OWIB73C-220	22	1KHZ	0.15	0.90	1.63
OWIB73C-270	27	1KHZ	0.21	0.81	1.46
OWIB73C-330	33	1KHZ	0.25	0.72	1.31
OWIB73C-390	39	1KHZ	0.31	0.67	1.24
OWIB73C-470	47	1KHZ	0.35	0.60	1.11
OWIB73C-560	56	1KHZ	0.43	0.55	0.94
OWIB73C-680	68	1KHZ	0.52	0.50	0.89
OWIB73C-820	82	1KHZ	0.60	0.46	0.84
OWIB73C-101	100	1KHZ	0.79	0.41	0.80

www.owolff.com

1. Inductance tested at 0.25V. Tolerance of inductance: 1.0uH~6.8uH: ±30%(N) 10uH~100uH: ±20%(M)
2. DCR test temp. limits 25°C.
3. This indicates the value of current when the inductance is 10% lower than its initial value at D.C. superposition or D.C. current.
4. To load current onto the components under normal ambience, which cause the temp. change as Δt=40°C or more lower current.
5. Please refer saturated current or the minimum temperature current as standard.