



OWI3316F TYPE



FEATURES

1. Various high power inductors are superior to be high saturation for surface mounting.




APPLICATIONS

1. Power supply for VTR, OA equipment.
2. LCD television set, notebook PC.
3. Portable communication, equipments.
4. DC/DC converters, etc.

ELECTRICAL CHARACTERISTICS FOR OWI3316F SERIES

Part Number	Inductance (uH) ⁽¹⁾	Test Frequency	DC Resistance (Ω MAX) ⁽²⁾	Saturation Current (A) ⁽³⁾	Temperature Current (A) ⁽⁴⁾
OWI3316F-1R0	1.0	100KHZ	9m	9.0	9.80
OWI3316F-1R5	1.5	100KHZ	10m	8.0	9.20
OWI3316F-2R2	2.2	100KHZ	13m	7.0	7.00
OWI3316F-3R3	3.3	100KHZ	15m	6.4	6.50
OWI3316F-4R7	4.7	100KHZ	18m	5.4	5.60
OWI3316F-6R8	6.8	100KHZ	27m	4.6	4.50
OWI3316F-100	10	100KHZ	38m	3.8	3.90
OWI3316F-150	15	100KHZ	56m	3.0	3.10
OWI3316F-220	22	100KHZ	85m	2.6	2.70
OWI3316F-330	33	100KHZ	0.10	2.0	2.10
OWI3316F-470	47	100KHZ	0.16	1.6	1.80
OWI3316F-680	68	100KHZ	0.22	1.4	1.50
OWI3316F-101	100	100KHZ	0.28	1.2	1.30
OWI3316F-151	150	100KHZ	0.40	1.0	1.00
OWI3316F-221	220	100KHZ	0.61	0.8	0.80
OWI3316F-331	330	100KHZ	1.02	0.6	0.68
OWI3316F-471	470	100KHZ	1.27	0.5	0.60
OWI3316F-681	680	100KHZ	2.20	0.4	0.42
OWI3316F-102	1000	100KHZ	3.00	0.3	0.34

www.owolff.com

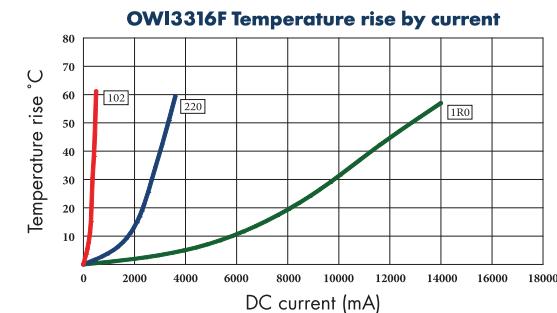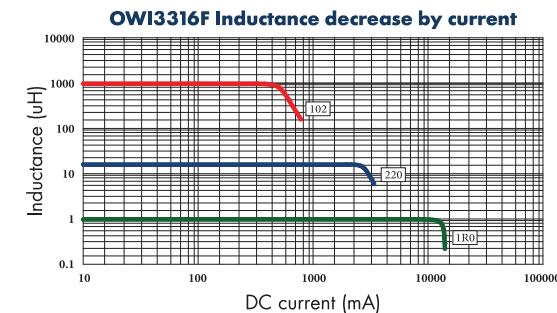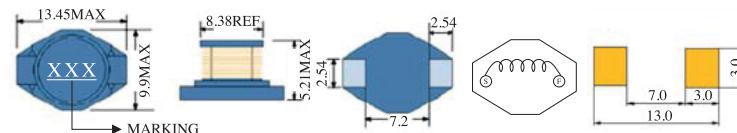

1. Inductance tested at 0.25V. Tolerance of inductance:
1.0uH~3.3uH: ±30%(N) 4.7uH~1000uH: ±20%(M)
2. DCR test temp. limits 25°C.
3. This indicates the value of current when the inductance is 10% lower than its initial value at D.C. superposition or D.C. current.
4. To load current onto the components under normal ambience, which cause the temp. change as $\Delta t=40^{\circ}\text{C}$ or more lower current.
5. Please refer saturated current or the minimum temperature current as standard.