



OWI3DF TYPE




FEATURES

1. Various high power inductors are superior to be high saturation for surface mounting.

APPLICATIONS



1. Power supply for VTR, OA equipment.
2. LCD television set, notebook PC.
3. Portable communication, equipments.
4. DC/DC converters, etc.

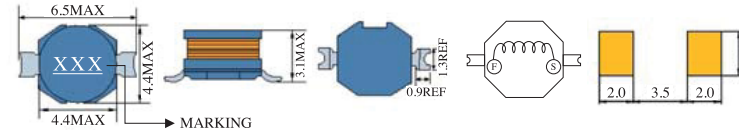

ELECTRICAL CHARACTERISTICS FOR OWI3DF SERIES

Part Number	Inductance (uH) ⁽¹⁾	Test Frequency	DC Resistance (Ω MAX) ⁽²⁾	Saturation Current (A) ⁽³⁾	Temperature Current (A) ⁽⁴⁾
OWI3DF-1R0	1.0	100KHZ	72m	1.34	2.90
OWI3DF-1R5	1.5	100KHZ	84m	1.22	2.60
OWI3DF-2R2	2.2	100KHZ	108m	1.08	2.30
OWI3DF-3R3	3.3	100KHZ	134m	0.97	2.00
OWI3DF-4R7	4.7	100KHZ	160m	0.91	1.80
OWI3DF-6R8	6.8	100KHZ	197m	0.79	1.50
OWI3DF-100	10	100KHZ	330m	0.63	1.10
OWI3DF-120	12	100KHZ	350m	0.59	1.00
OWI3DF-150	15	100KHZ	400m	0.56	0.92
OWI3DF-180	18	100KHZ	450m	0.51	0.88
OWI3DF-220	22	100KHZ	534m	0.47	0.86
OWI3DF-270	27	100KHZ	618m	0.43	0.80
OWI3DF-330	33	100KHZ	903m	0.37	0.72
OWI3DF-390	39	100KHZ	1.01	0.34	0.62
OWI3DF-470	47	100KHZ	1.36	0.29	0.56
OWI3DF-560	56	100KHZ	1.52	0.28	0.52
OWI3DF-680	68	100KHZ	1.71	0.26	0.48
OWI3DF-820	82	100KHZ	2.31	0.22	0.43
OWI3DF-101	100	100KHZ	2.64	0.21	0.40
OWI3DF-121	120	100KHZ	3.50	0.19	0.36
OWI3DF-151	150	100KHZ	4.13	0.17	0.33
OWI3DF-181	180	100KHZ	4.53	0.16	0.30
OWI3DF-221	220	100KHZ	6.65	0.13	0.27
OWI3DF-271	270	100KHZ	7.52	0.12	0.24

www.owloff.com

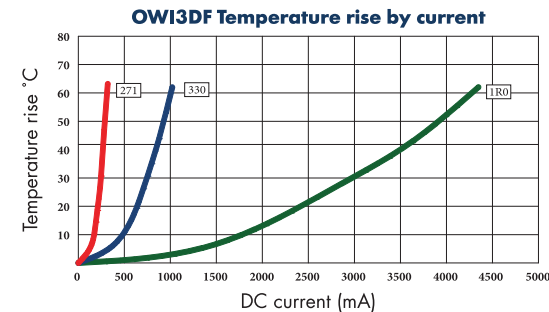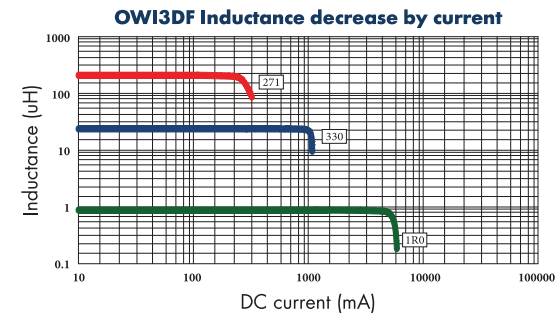

1. Inductance tested at 0.25V. Tolerance of inductance: 1.0uH~6.8uH: ±30%(N) 10uH~270uH: ±20%(M)
2. DCR test temp. limits 25°C.
3. This indicates the value of current when the inductance is 10% lower than its initial value at D.C. superposition or D.C. current.
4. To load current onto the components under normal ambience, which cause the temp. change as Δt=40°C or more lower current.
5. Please refer saturated current or the minimum temperature current as standard.